

PLRS


Sound System & Stage Hire

TS1 Stage

5m Wide, 4m Deep, 4m High




PLRS Media Ltd	
TS1 Stage	07/07/23
View	Front Elevation

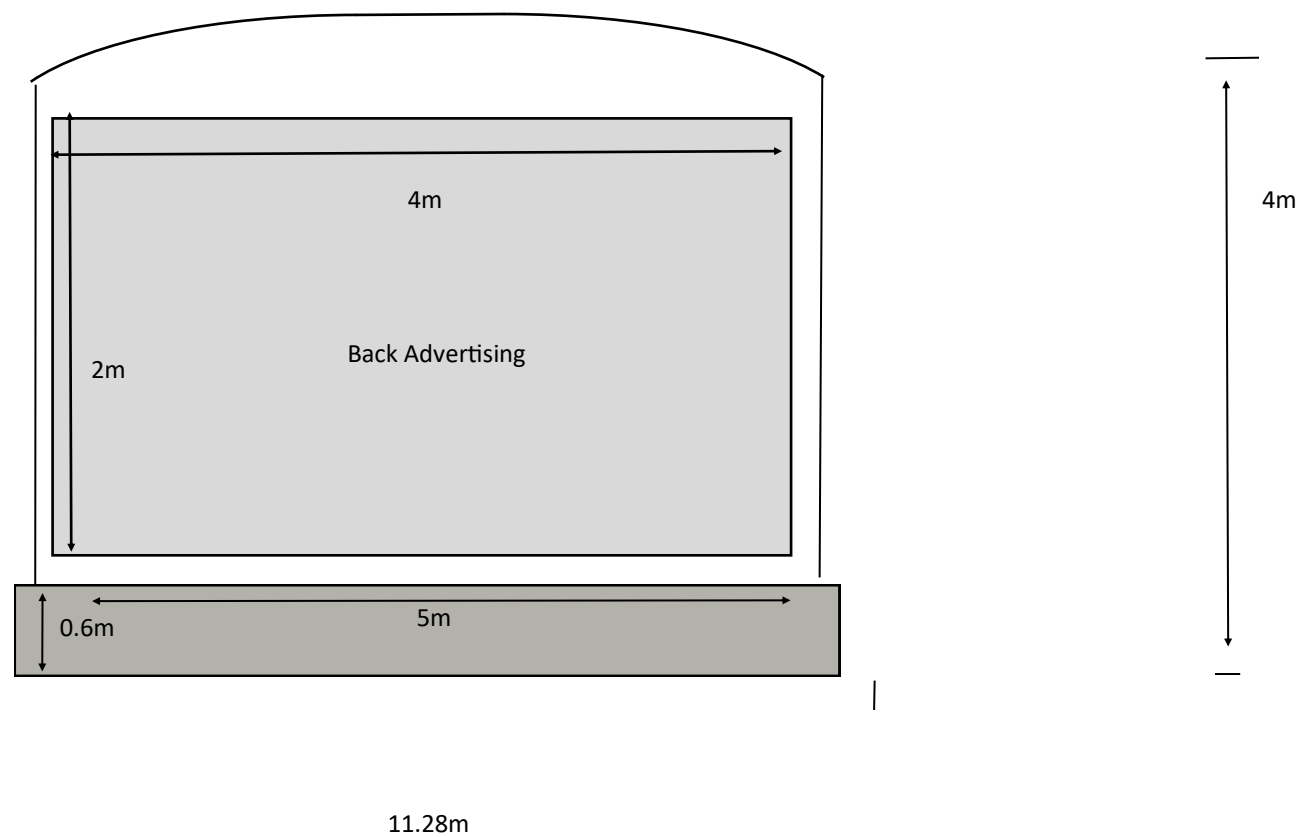

PLRS Media Ltd	
TS1 Stage	07/07/2023
View	Plan Elevation


Steps
(can be relocated)

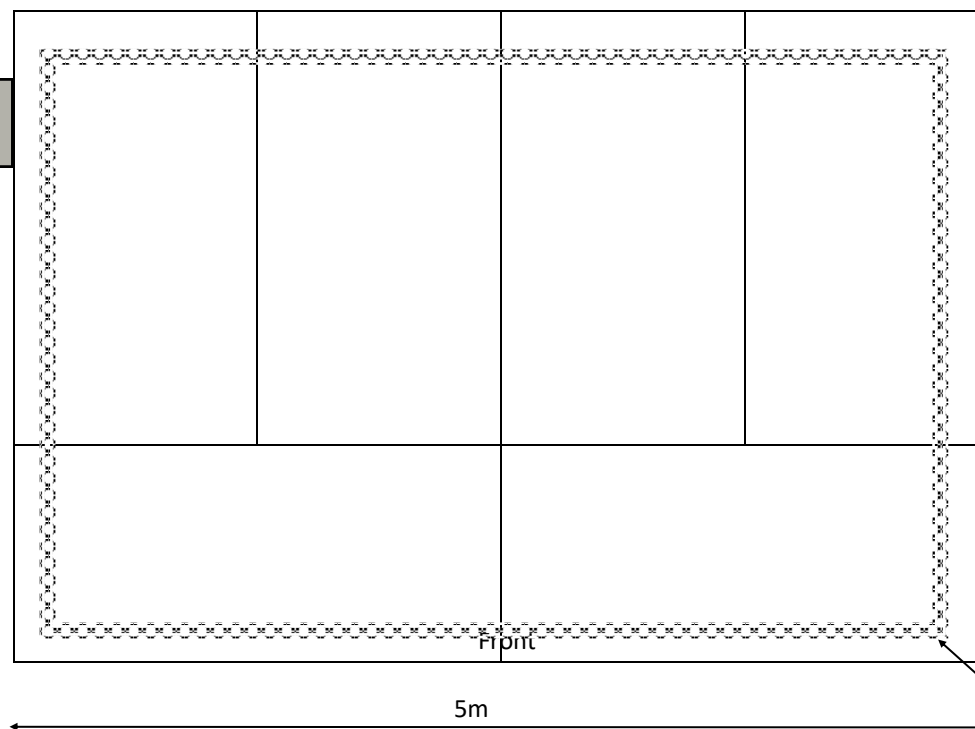

PLRS Media Ltd	
TS1 Stage	07/07/2023
View	Side Elevation

Rear

3.m

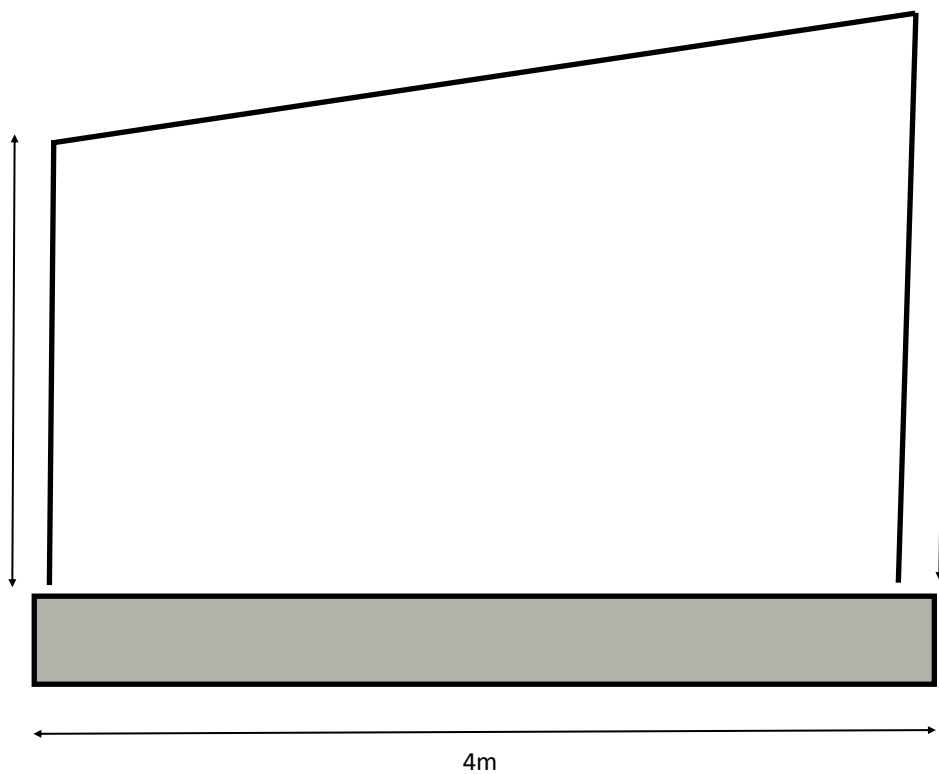






3.5m

Front

PLRS Media Ltd

TS1 Stage 07/07/2023

View Wind Safety Levels

Monitoring Interval	Action Level	Action
8 hourly		Regular Weather Forecast Review.
Hourly		Regular on Site Assessment
30 mins		Prepare to halt erection operations until safe working conditions have resumed. During Phase D (Show) it is likely that Show Stop will occur in this range due to factors other than TDS safety
15 mins		Site safety meeting and risk assessment. Prepare for full site evacuation
Constant		Site evacuation procedure to be implemented

			Trussing Stage TS1 (Arch on Folding Units)				
			Stage Type	Roof Only	Roof & Back	Roof & scrim back & sides	Roof, back & Roof, Back & Sides
Wind Speed			Surface Area (m2)	18	36	39	48 61
			Mass (kg)	740	740	740	740 740
BF	mph	m/s					
3	8	3.6	0	0	0	0	0
3	10	4.5	0	0	0	0	0
3	12	5.4	0	0	0	0	0
4	14	6.3	0	0	0	0	0
4	16	7.2	0	0	0	0	0
5	18	8.0	0	0	0	0	0
5	20	8.9	0	0	0	0	0
5	22	9.8	0	0	0	0	0
5	24	10.7	0	0	0	0	0
6	26	11.6	0	0	0	0	0
6	28	12.5	0	0	0	0	108
6	30	13.4	0	0	0	32	234
7	32	14.3	0	0	0	138	368
7	34	15.2	0	0	66	251	511
7	36	16.1	0	80	163	371	662
7	38	17.0	0	174	266	498	822
8	40	17.9	0	272	375	632	991